



# RACK-MOUNT 4-WIRE BOX type C1NR

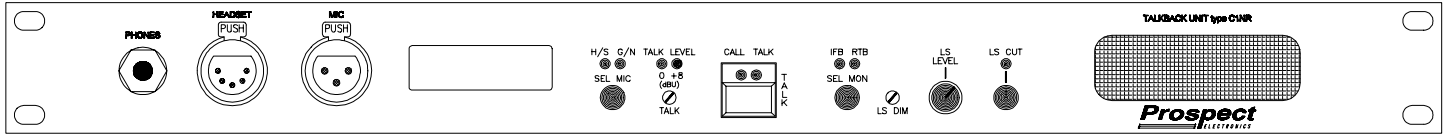

C1NR FRONT PANEL

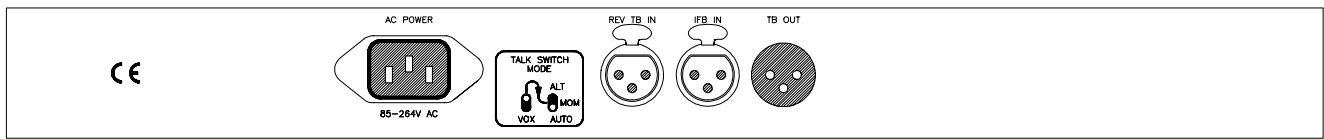

C1MR REAR PANEL (SAME AS C1NR)

## FEATURES

1	1U rack-mount case	10	TALK switch with selectable latch mode & VOX operation
2	XLR3 microphone socket with selectable phantom power	11	Adjustable TALKBACK output level
3	85-264V AC mains input on IEC connector	12	TALKBACK output peak level indicator (0dBu & +8dBu)
4	TALKBACK output on male XLR3 connector	13	Selectable monitoring of IFB or REV TB inputs
5	REVERSE TALKBACK input on female XLR3 connector	14	Signal presence (CALL) LED on selected input
6	IFB input on female XLR3 connector	15	LS LEVEL control & LS CUT switch
7	HEADPHONE output on 6.4mm (1/4") jack	16	LS DIM: adjustable, 0dB to OFF
8	HEADSET input/output on female XLR5 connector	17	1.5 watt loudspeaker power (peak)
9	Separate gain adjustments for headset and stem mic's	18	Pre-selectable startup mode for control panel functions

## BLOCK DIAGRAM

